


ENGINE PERFORMANCE CURVES

ENGINE MODEL D 914 L03
RATING STANDARD ISO 14396
RATED INTERMITTENT POWER (gross) 57.6 Hp at 2300 rpm
MAX. TORQUE 150 lb-ft at 1500 rpm
EMISSION CERTIFICATION EPA Tier 4i/COM 3a

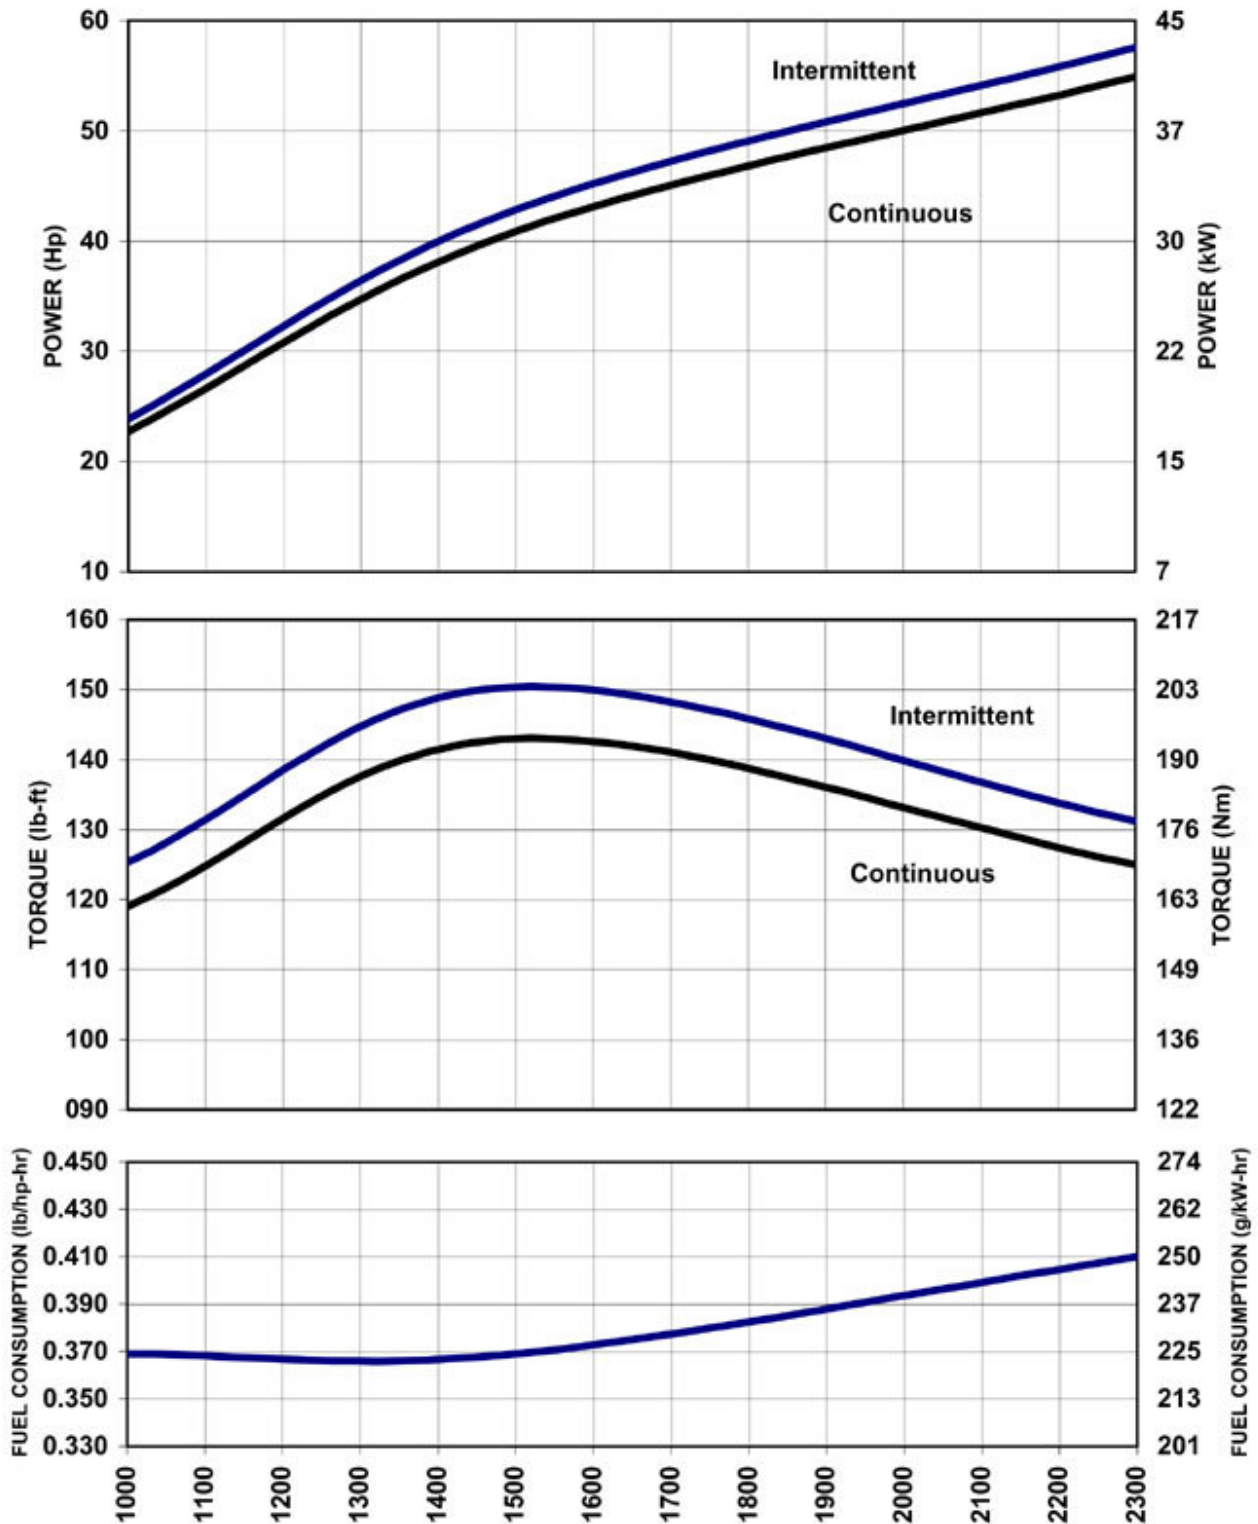

Tolerance: +/- 5% per ISO 14396

Reference conditions: 25 °C (77 °F) 99 kPa (29.31 in. Hg)

Fuel: 40 °C (104 °F) 0.850 kg/l (7.07 lb/gal)

Curves are based on current data and are subject to change without notice.

Document: D914L03 T4i

Date: 12 Dec, 2007

Name: B. Wilson

Printed 12/12/2007,8:31 AM